


Single Sliding System - Timber Doors

Flush Setting Top Track



- A - Opening frame width.
- C - Distance from finished floor to underside of track.
- D - Distance from finished floor to underside of support beam.
- E - Projection of door from wall.
- F - Clear opening width.

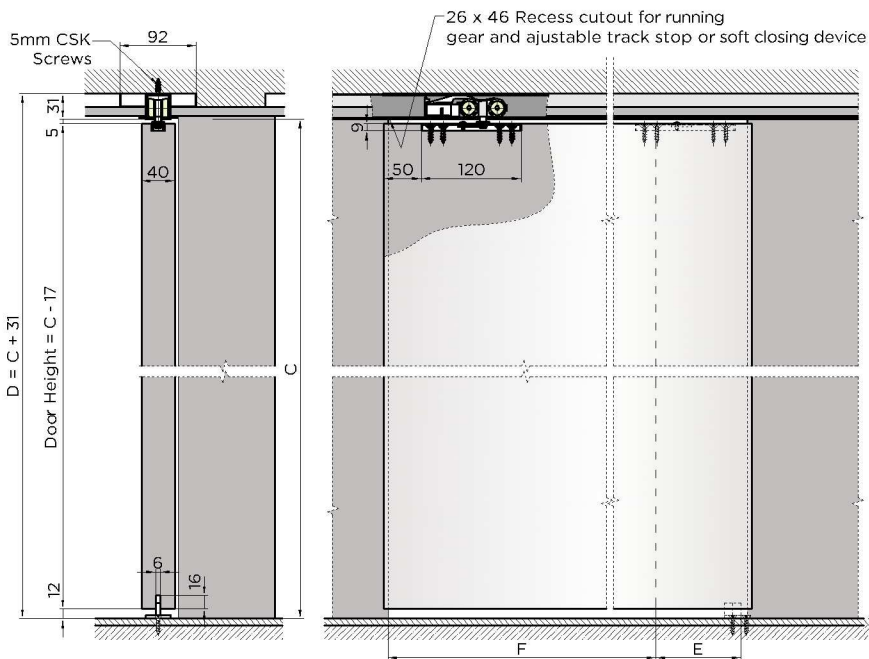


Tornex offers the ultimate sliding door system, manufactured to the highest quality standards and utilizing a premium nylon sealed ball bearing system to ensure quiet and smooth running action.

With a contemporary aesthetic design that simply looks sensational, Tornex cavity sliders provide a functional, space saving solution to cater for almost every application and design preference.

Key Features

- Custom made with sliding door hardware installed and pre-set for quick and easy installation.
- Corrosion resistant, ideal for wet areas and both domestic and commercial applications.
- Slim-line top track for flush ceiling setting and minimal installation height.
- 10mm plasterboard fits neatly inside top track recess.
- Premium nylon sealed ball bearing rollers ensure smooth and quiet running action, suitable for coastal applications.
- Built in adjustable track stops to hold doors in desired position
- Bi-directional soft-close options.

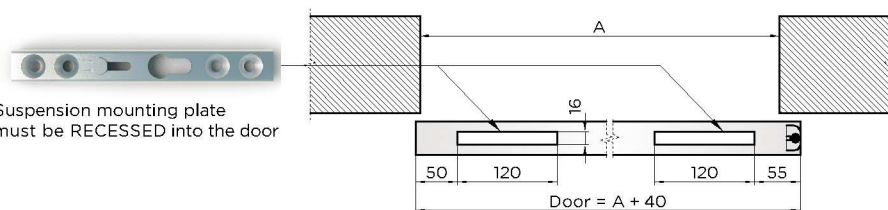

Suspension mounting plate must be RECESSED into the door